



**Department of Public Works**  
SANTA ROSA COUNTY, FLORIDA  
Milton, Florida 32583

Glenn Bailey  
Asst. Public Works Director  
6075 Old Bagdad Hwy.

Thad Allen  
Superintendent  
Building Maintenance/Parks  
P.O. Box 864  
623-1569 • 939-1877

Stephen L. Furman P.E.  
Director of Public Works  
6075 Old Bagdad Hwy.  
(850) 626-0191  
Fax 623-1331

**MEMORANDUM**

TO: Tony Gomillion, County Administrator

FROM: Stephen Furman, Public Works Director

DATE: July 19, 2016

SUBJECT: Madura Five Inlet and Pipe Work 

**RECOMMENDATION**

Discussion of award of bid to Brown Construction of NW Florida Inc. for the repair and replacement of two stormwater inlets and associated piping at the intersection of Madura Road and Madura Five, in the amount of \$18,243.65, with funding from the Road and Bridge budget.

**BACKGROUND**

The roadway named Madura Five is a part of the Tiger Point subdivision development and was constructed in the late 1970's and early 1980's. The roadway was constructed just a few feet above sea level, and is frequently flooded due to high tides. The stormwater piping system originally installed is aging; and the inlets at the intersection of Madura Road and Madura Five are collapsing due to deterioration. The project to repair/replace the inlets and the associated pipes will require the continual dewatering of the area, and a dedication of resources that our current staffing may not be able to provide. Therefore, we solicited prices from several local contractors that routinely perform this type of work. Brown Construction of NW Fl. Inc, was the low bidder; and we have confidence that Brown can accomplish the work with the least possible disruption to the residents and the infrastructure.



Since 1995  
 Certified General &  
 Underground Utility Contractors  
 CGC045510 CUC056748 AL44998



Jimmy White  
 Santa Rosa County

July 14, 2016

**Madura 5 - Inlet Replacement**

We are please to provide our price for the following scope of work on the above referenced project.

---

<b><u>Mobilization</u></b>	1	LS	
<b><u>Storm Drainage</u></b>			
1 Demo Existing & Haul Off	1	LS	
2 Dewatering	1	LS	
3 R&R 24" RC Pipe	40	LF	
4 Type A Inlet	2	EA	
5 Stone Base	1	LS	
6 Dress/Seed & Mulch	1	LS	
			<b>Project Total... \$ 18,243.65</b>

---

Notes:

- 1 Items not specifically noted are excluded.
- 5 Removal & Replacement of Unsuitable Bedding and Backfill Material is excluded. Bedding and Backfill material to be insitu / existing material unless otherwise noted in scope above.

---

Thank you for the opportunity to quote this work. Should you have any questions or need further information, please do not hesitate to call.

Sincerely,

LEE BROWN  
 Vice President

10200 Cove Ave | Pensacola, FL 32534  
 850.473.9039 office | 850.473.9063 fax  
[lee@thebrownconstruction.com](mailto:lee@thebrownconstruction.com)

# Three Trade Consultants, Inc.

# PROPOSAL

5690 Jeff Ates Rd., Milton, FL 32583

Ph.: (850) 626-9972 Fax: (850) 626-7414

Email: thretrade@bellsouth.net

Page No. 1 of 1 Pages

To: 

Santa Rosa County
Attn: Jimmy White
554.0373
jimmyw@santarosa.fl.gov

JOB NAME: <b>Madure Five Storm Repair</b>
LOCATION: <b>Gulf Breeze, FL</b>
CONTACT: <b>Bradley Rhodes</b>
PHONE: <b>850.382.3638</b>
DATE: <b>June 10, 2016</b>

THE FOLLOWING PROPOSAL IS ONLY AN ESTIMATE OF LABOR AND MATERIAL REQUIRED TO PERFORM THE JOB CORRECTLY WITHIN INDUSTRY STANDARDS, THE ACTUAL WORK MAY REQUIRE CHANGES AND MATERIALS NOT VISIBLE OR OBVIOUS AT THE TIME OF THE PROPOSAL. WE WILL FURNISH LABOR, MATERIALS AND EQUIPMENT NECESASARY TO THE TASK LISTED BELOW:

1 Mobilization	1 LS
2 Dewatering	1 LS
3 Demo/Replace Type A Curb Inlet	2 EA
4 Demo/Replace 24" RCP Storm Crossing	36 LF
5 Sod Disturbed Area	2 Pallets
6 Subgrade and Road Base Patch	44 SY

Notes and Exceptions: NO permits, bonds, fees, landscaping, irrigation, entrance signage, conduit, utility coordinations, undercutting, backfilling, imported pipe bedding, or anything else that is not quoted above.

WE PROPOSE hereby to furnish material and labor-Complete in accordance with these specifications, for the sum of: **Dollars ( \$ 18,900.00 )**

\* Payable as follows: **Due Upon Completion of Each Phase as Determined by Three Trade Consultants, Inc.**

All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. Any alteration or deviation from the above specification involving extra cost will be executed upon signed change orders, and will become an additional expense over and above the estimate. Three Trade not responsible for delays caused by force majeure. Owner to carry all necessary forms of insurance. Our workers are fully covered by workers compensation insurance. This is a contract for goods and services, in the event of a dispute, prevailing party attorneys fees and costs apply.

Authorized Signature for Three Trade Consultants, Inc. \_\_\_\_\_ Date: \_\_\_\_\_


Note: This proposal may be withdrawn by us if not returned signed & notarized within **30** days.

**ACCEPTANCE OF PROPOSAL** -- The prices, specifications and conditions are satisfactory and are hereby accepted. You/your company are authorized to do the work as specified. Upon your signature you personally guarantee that Payment shall be made as outlined above. Work will be scheduled once this proposal is signed, Notarized & Original returned to the office.

Authorized Signature: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_  
 State of \_\_\_\_\_  
 County of \_\_\_\_\_

The following instrument was acknowledged before me this \_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_, by \_\_\_\_\_ who is personally known to me or who produced \_\_\_\_\_ as identification.

Seal: \_\_\_\_\_ Notary Signature \_\_\_\_\_  
 Name (print) \_\_\_\_\_

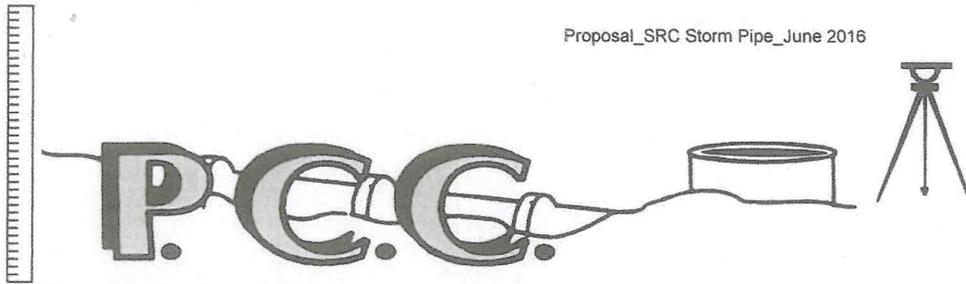

**Pensacola Concrete Construction Co., Inc.**

*Preferred Quality*  
 ◆  
*Professional Satisfaction*  
 ◆

*"An Employee Owned Company"*

CUC1224436 • AL 12750

Mr. Jimmy White  
 Santa Rosa County. Public Works  
 6075 Old Bagdad Highway  
 Milton, FL 32583

June 28, 2016

Re: Madura Rd & Madura Five Storm Pipe Repair

Item No.	Description	QTY	Unit	Unit Price	Total
1	Remove and Replace existing Type "A" Curb Inlet w/ throat and transitions	1	EA	\$4,969.96	\$4,969.96
2	Remove and Replace existing Type "A1" Curb Inlet w/ throat and transitions	1	EA	\$5,274.15	\$5,274.15
3	Rehab Inlet Structures using Strong High Performance mix	2	EA	\$3,189.50	\$6,379.00
4	Install 18" CIPP Liner	40	LF	\$213.04	\$8,521.60
5	Dewatering	1	LS	\$875.00	\$875.00
6	M.O.T.	1	LS	\$500.00	\$500.00
7	Mobilization	1	LS	\$1,000.00	\$1,000.00
<b>TOTAL:</b>					<b>\$27,519.71</b>

**Notes:**

1. Items No. 1 & No. 2 are for the full removal and replacement of the curb inlet tops.
2. Item No. 3 is based on rehabbing the existing structures with a cementitious product at a 1/2" thickness. When complete, the structures shall be free of any infiltration or cracks.
3. Item No. 4 is proposed in lieu of excavating across the road. This will prevent disruption to the homeowners.
4. Please allow 10 days for completion.
5. Pricing good for 30 days.

*If accepting this proposal, sign below and return original signed copy to Pensacola Concrete.*

Sign: \_\_\_\_\_ Date: \_\_\_\_\_  
 Authorized Signature

*If there are any questions concerning this proposal please feel free to call me at my office (850) 476-0026.*

Respectfully Submitted by,

*Ben Joyner Jr.*  
 Ben Joyner, President  
 Pensacola Concrete Construction Company, Inc.